

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **2JZ-GTE Late model**

PART NUMBER **SET** **IN** **EX** **1405270098**

GRIND **IN** **EX** **270° /9.8mm** **SOLID** BASE CIRCLE **IN** **EX** **36** ROCKER ARM RATIO※ **-** VALEVE CLEARANCE **IN** **EX** **0.30**
WHEN COLD

LIFT **IN** **EX** **@CAM 9.8mm** **@VALVE 9.5mm** LOBE CENTER(°) **IN** **EX** **115.0**

*ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	A CTUAL DURATION @OPENING(°)
A CTUAL DURATION	IN			
VALVE LIFT	EX	BBDC	ATDC	270.0





*Values shown are,from start to the end of actual duration.(Excluding rht ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm	IN			
VALVE LIFT	EX	BBDC	ATDC	235.5

*Values are of actual duration from start to end of 1mm value points.(Ezcluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05"	IN			
VALVE LIFT	EX	BBDC	TDC	230.0

*Values are of actual duration from start to end of 0.05" value points.(Excluding ramp values)

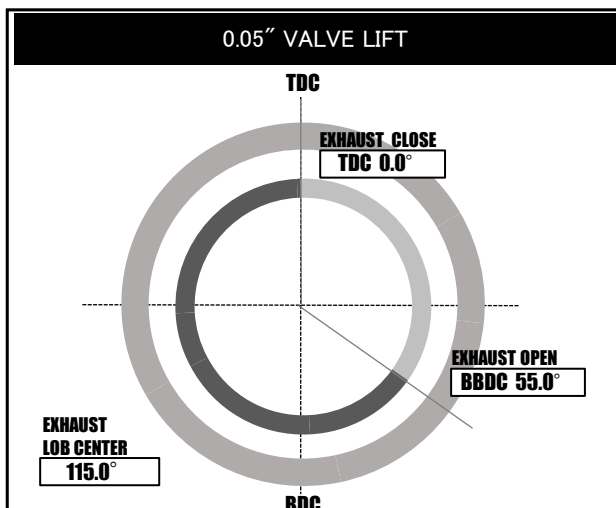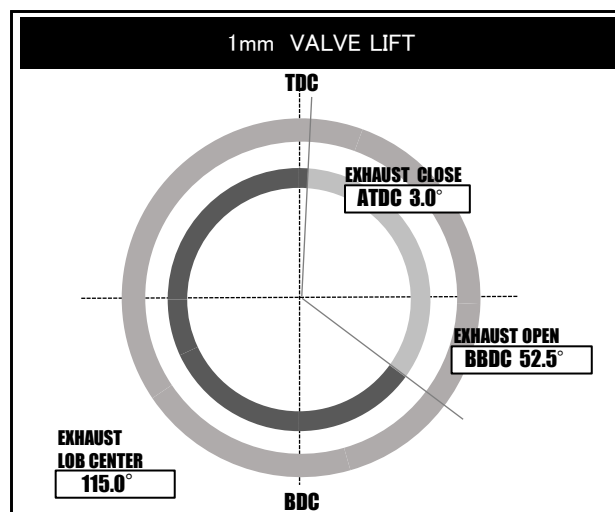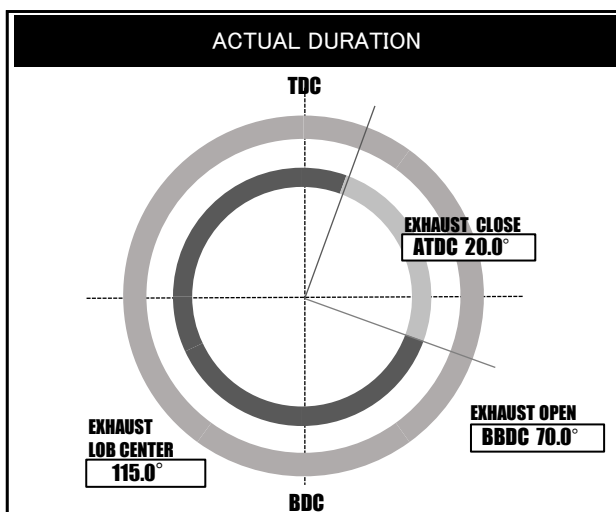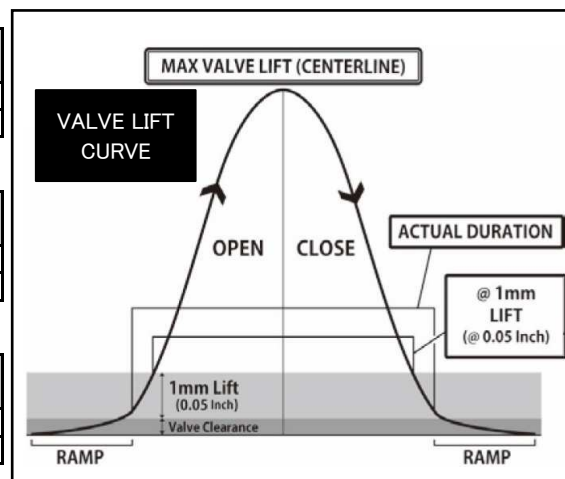

REQUIRED VALVE SPRING SPEC

NOMAL HIGHT	
SET LENGTH	
LIFT LENGTH	
COMPRESSED HEIGHT	
SET LAOD	
LIFT LOAD	
TOMEI PART NUMBER	

REQUIRED PARTS

PRODUCT NAME	TOMEI P/N
VALVE SPRING	163062

TOMEI
The Engine Specialist

