

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **A12/14/15**

PART NUMBER **1481296070**

GRIND **296° /7.00mm SOLID** BASE CIRCLE **27.6** ROCKER ARM RATIO※ **1.5** VALEVE CLEARANCE WHEN COLD **0.30**

LIFT **@CAM 7.00mm @VALVE 10.10mm** LOBE CENTER(°) **103.5**

*ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		A CTUAL DURATION @OPENING(°)
A CTUAL DURATION	IN	BTDC	44.5	ABDC	71.5	296.0
VALVE LIFT	EX	BBDC	71.5	ATDC	44.5	296.0





*Values shown are,from start to the end of actual duration.(Excluding rht ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	BTDC	21.5	ABDC	48.5	250.0
VALVE LIFT	EX	BBDC	48.5	BTDC	21.5	250.0

*Values are of actual duration from start to end of 1mm value points.(Ezcluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	BTDC	20.0	ABDC	47.0	247.0
VALVE LIFT	EX	BBDC	47.0	ATDC	20.0	247.0

*Values are of actual duration from start to end of 0.05" value points.(Excluding ramp values)

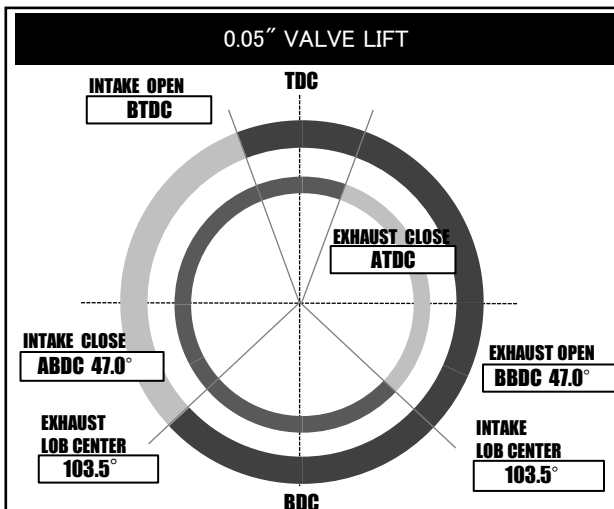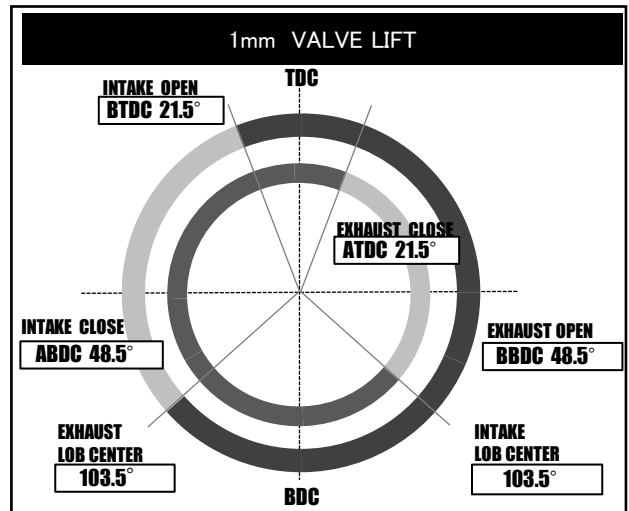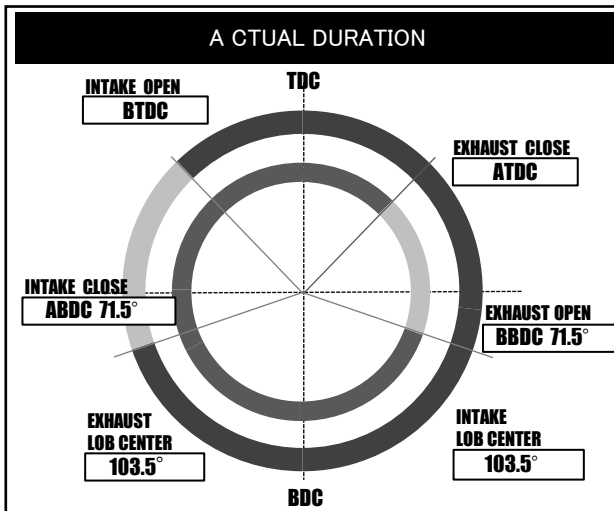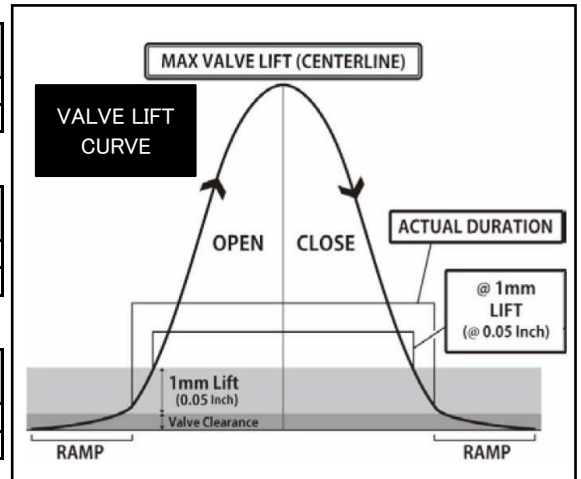

REQUIRED VALVE SPRING SPEC	
NOMAL HIGHT	45.9/48.1mm
SET LENGTH	34.7/38.0mm
LIFT LENGTH	23.7/27.0mm
COMPRESSED HEIGHT	21.2/25.2mm
SET LAOD	35.5kgf
LIFT LOAD	92.9kgf
TOMEI PART NUMBER	163038

REQUIRED PARTS	
PRODUCT NAME	TOMEI P/N