

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **A12/14/15**

PART NUMBER **1481304072**

GRIND **304° /7.25mm SOLID** BASE CIRCLE **27.4** ROCKER ARM RATIO※ **1.5** VALEVE CLEARANCE WHEN COLD **0.30**

LIFT **@CAM 7.25mm @VALVE 10.50mm** LOBE CENTER(°) **105.0**

*ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		A CTUAL DURATION @OPENING(°)
A CTUAL DURATION	IN	BTDC	47.0	ABDC	77.0	304.0
VALVE LIFT	EX	BBDC	77.0	ATDC	47.0	304.0





*Values shown are,from start to the end of actual duration.(Excluding rht ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	BTDC	24.0	ABDC	54.0	258.0
VALVE LIFT	EX	BBDC	54.0	ATDC	24.0	258.0

*Values are of actual duration from start to end of 1mm value points.(Ezcluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	BTDC	22.5	ABDC	52.5	255.0
VALVE LIFT	EX	BBDC	52.5	ATDC	22.5	255.0

*Values are of actual duration from start to end of 0.05" value points.(Excluding ramp values)

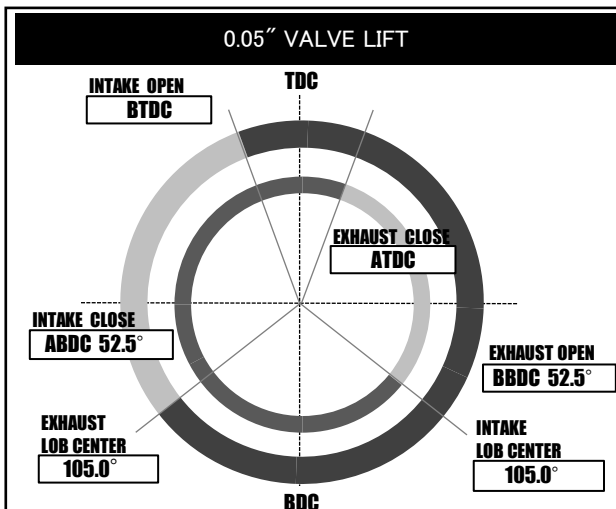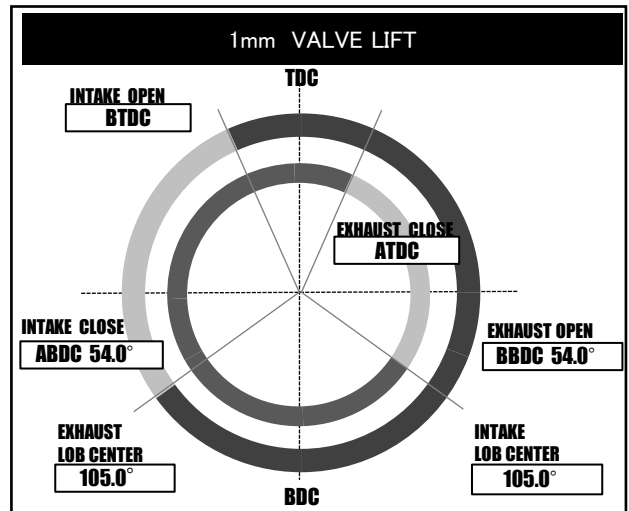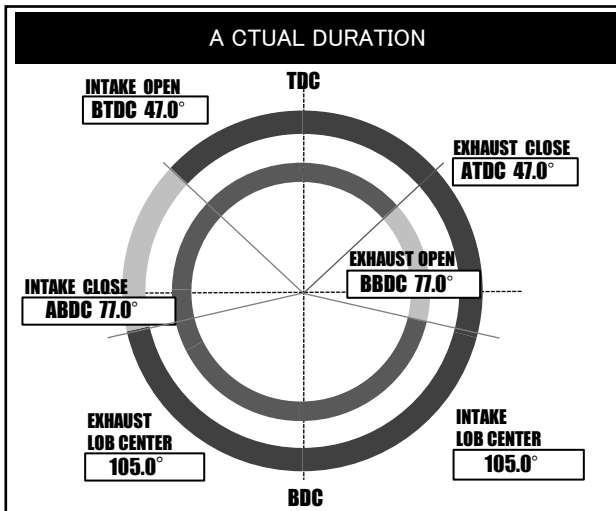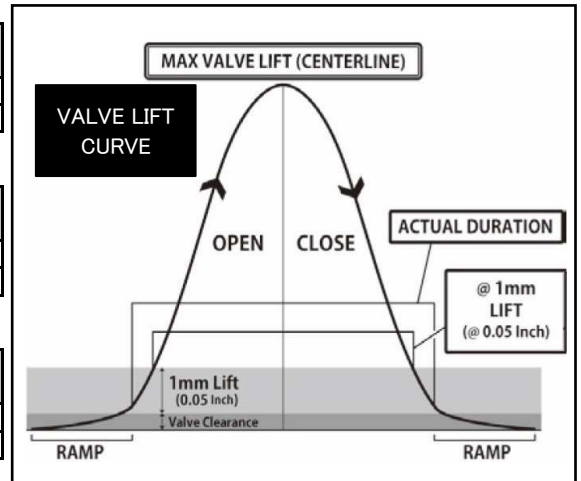

REQUIRED VALVE SPRING SPEC	
NOMAL HIGHT	45.9/48.1mm
SET LENGTH	34.7/38.0mm
LIFT LENGTH	23.7/27.0mm
COMPRESSED HEIGHT	21.2/25.2mm
SET LAOD	35.5kgf
LIFT LOAD	92.9kgf
TOMEI PART NUMBER	163038

REQUIRED PARTS	
PRODUCT NAME	TOMEI P/N