

TOMEI Camshaft Spec Card

PART NAME **PONCAM / PROCAM** ENGINE **BP-ZE NA8C (93.7-98.1)**

PART NUMBER SET **143053** IN **1495252092** EX **1496256095**

GRIND IN **252° / 9.20mm LASH** BACE IN **Φ33.6** ROCKER ARM RATIO * **-** VALVE CLEARANCE IN **-**
 EX **256° / 9.50mm LASH** CIRCLE(Φ) EX **Φ34.2** WHEN COLD EX **-**

LIFT IN **@CAM 9.20mm @VALVE 9.20mm** LOBE IN **110.0**
 EX **@CAM 9.50mm @VALVE 9.50mm** CENTER(°) EX **110.0**

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ opening(°)
Actual Duration	IN	BTDC 16.0	ABDC 56.0	252.0
Valve Lift	EX	BBDC 58.0	ATDC 18.0	256.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm	IN	ATDC 3.0	ABDC 37.0	214.0
Valve Lift	EX	BBDC 40.0	TDC 0.0	220.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05"	IN	ATDC 5.0	ABDC 35.0	210.0
Valve Lift	EX	BBDC 38.0	BTDC 2.0	216.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

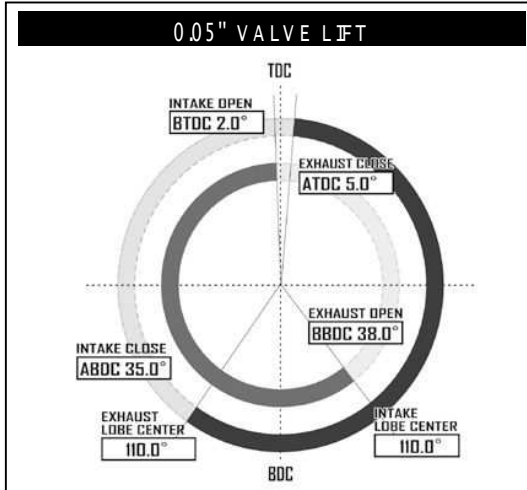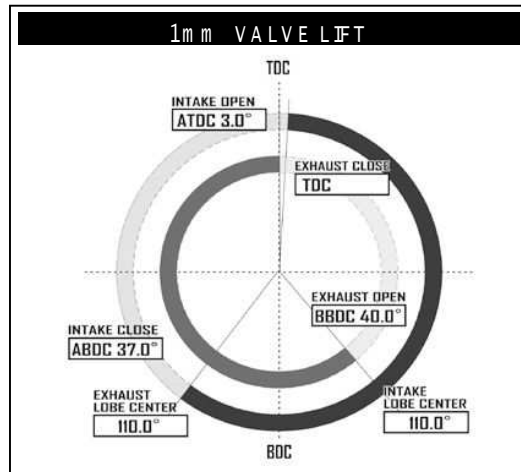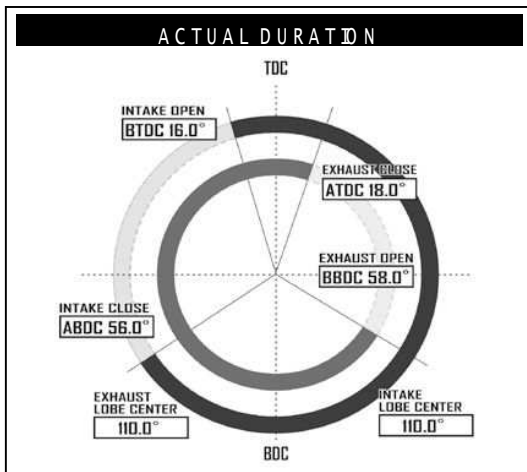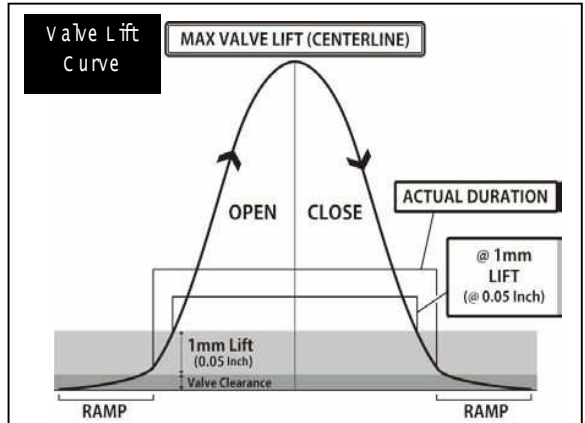

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	
SET LENGTH	
LIFT LENGTH	
COMPRESSED HEIGHT	
SET LOAD	
LIFT LOAD	
TOMEI PART NUMBER	

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER