

# TOMEI Camshaft Spec Card

PART NAME		PROCAM		ENGINE		L6	
PART NUMBER		1471320088					
GRIND	320° / 8.80mm	SOLID	BACE	Φ30.0	ROCKER ARM RATIO *	VALVE CLEARANCE IN	0.20
			CIRCLE(Φ)		1.5	WHEN COLD	EX 0.25
LIFT	@CAM 8.80mm	@VALVE 12.80mm	LOBE CENTER(°)	105.0			

\* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		Actual Duration @ opening(°)
Actual Duration	IN	BTDC	55.0	ABDC	85.0	320.0
Valve Lift	EX	BBDC	85.0	ATDC	55.0	320.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	BTDC	34.0	ABDC	64.0	278.0
Valve Lift	EX	BBDC	64.0	ATDC	34.0	278.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	BTDC	32.0	ABDC	62.0	274.0
Valve Lift	EX	BBDC	62.0	ATDC	32.0	274.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

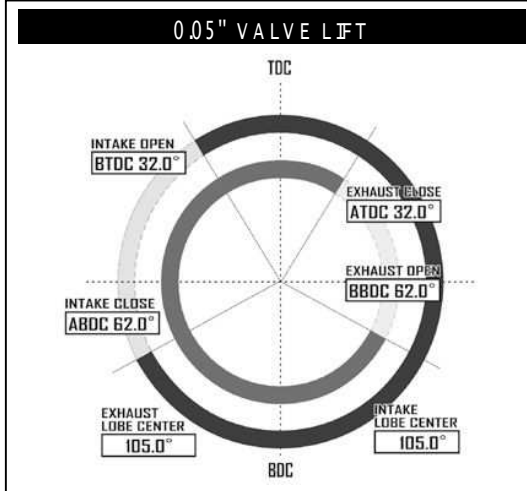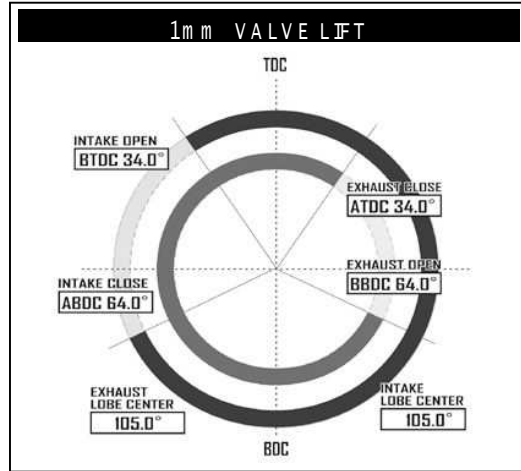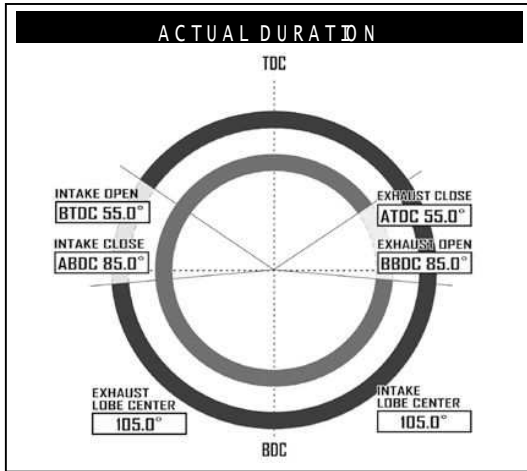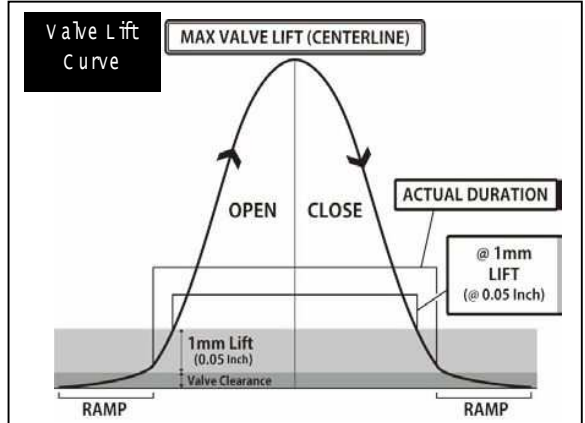

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	
SET LENGTH	
LIFT LENGTH	
COMPRESSED HEIGHT	
SET LOAD	
LIFT LOAD	
TOMEI PART NUMBER	

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER