

TOMEI Camshaft Spec Card

PART NAME		PROCAM		ENGINE		L6	
PART NUMBER		1471320093					
GRIND	320° / 9.30mm	SOLID	BACE	Φ28.8	ROCKER ARM RATIO *	VALVE CLEARANCE IN	0.20
			CIRCLE(Φ)		1.5	WHEN COLD EX	0.25
LIFT	@CAM 9.30mm	@VALVE 13.50mm	LOBE CENTER(°)	105.0			

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ opening(°)
Actual Duration Valve Lift	IN	BTDC 55.0	ABDC 85.0	320.0
	EX	BBDC 85.0	ATDC 55.0	320.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm Valve Lift	IN	BTDC 35.0	ABDC 65.0	280.0
	EX	BBDC 65.0	ATDC 35.0	280.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05" Valve Lift	IN	BTDC 33.0	ABDC 63.0	276.0
	EX	BBDC 63.0	ATDC 33.0	276.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

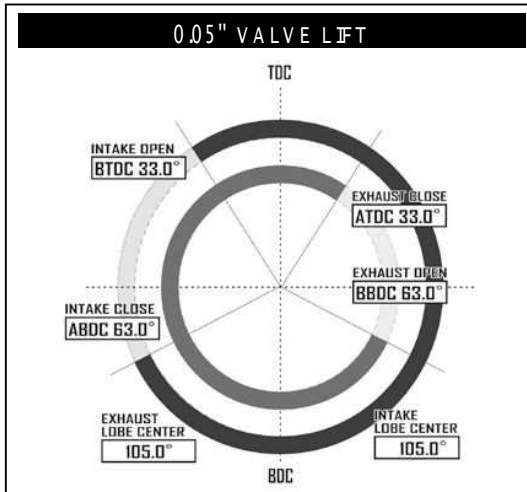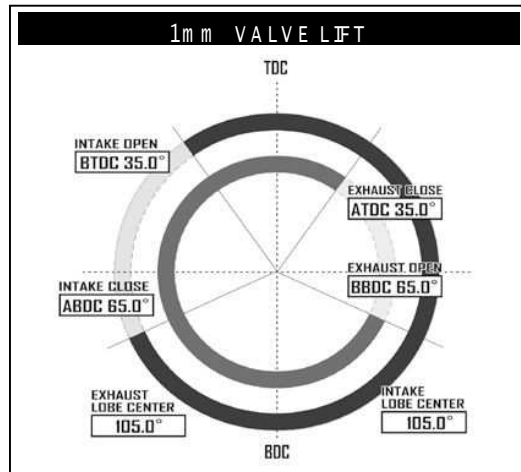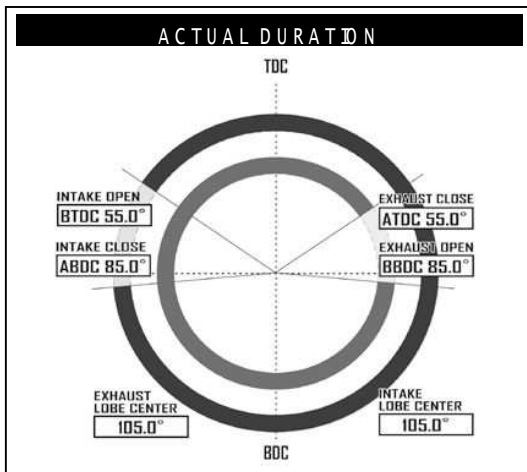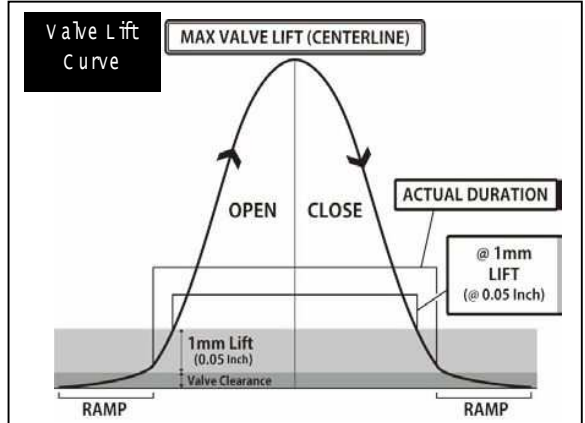

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	
SET LENGTH	
LIFT LENGTH	
COMPRESSED HEIGHT	
SET LOAD	
LIFT LOAD	
TOMEI PART NUMBER	

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER