

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **VQ35HR**

PART NUMBER **SET** - **IN** **142043** **EX** **142044**

GRIND **IN** **272° / 11.30mm** - **BACE** **IN** **Φ35.4** **ROCKER ARM RATIO*** **VALVE CLEARANCE** **IN** **0.30**
EX **272° / 11.00mm** - **CIRCLE(Φ)** **EX** **Φ35.4** - **WHEN COLD** **EX** **0.33**

LIFT **IN** **@CAM 11.30mm @VALVE 11.00mm** **LOBE** **IN** **122.0**
EX **@CAM 11.00mm @VALVE 10.67mm** **CENTER(°)** **EX** **124.0**

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ Opening(°)
Actual Duration	IN	BTDC 14.0	ABDC 78.0	272.0
Valve Lift	EX	BBDC 80.0	ATDC 12.0	272.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm	IN	ATDC 1.0	ABDC 63.0	242.0
Valve Lift	EX	BBDC 65.0	BTDC 3.0	242.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05"	IN	ATDC 3.0	ABDC 61.0	238.0
Valve Lift	EX	BBDC 63.0	BTDC 5.0	238.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

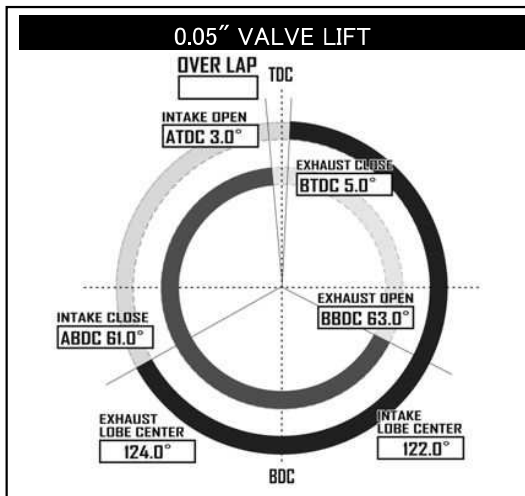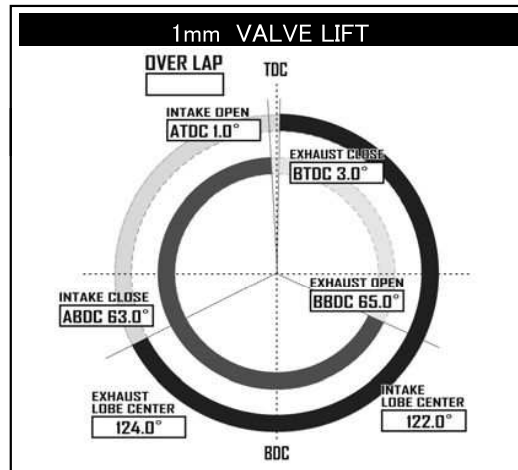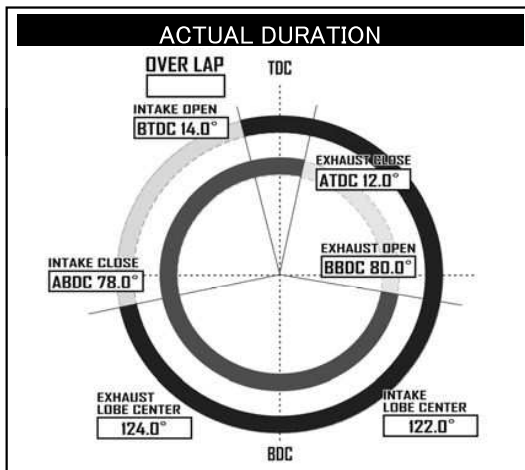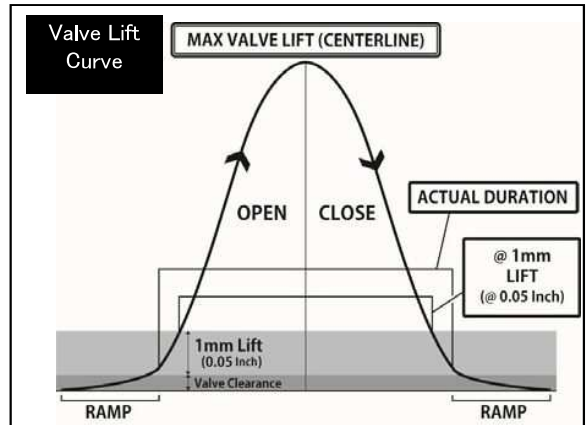

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	49.1
SET LENGTH	37.0
LIFT LENGTH	26.0
COMPRESSED HEIGHT	25.0
SET LOAD	24.0 ± 6%
LIFT LOAD	56.8 ± 6%
TOMEI PART NUMBER	163037

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER