

TOMEI Camshaft Spec Card

品名 **PONCAM / PROCAM** 適合 **2JZ-GTE Early model**

品番 **SET 143072** IN **1402264095** EX **1403264095**

スペック IN 264° /9.50mm SOLID ベース円 IN $\phi 36.0$ ロッカーアームレシオ※ 冷間時 IN 0.20
EX 264° /9.50mm SOLID EX $\phi 36.0$ - パルプクリアランス EX 0.30

リフト IN @CAM 9.50mm @VALVE 9.30mm 初期設定 IN 113.0
EX @CAM 9.50mm @VALVE 9.20mm 中心角(°) EX 118.0

*すべてのリフト値はラッシュアジャスターが動作していない時、およびロッカーアームレシオから計算した理論値です。

カムタイミング		OPENS(°)	CLOSES(°)	有効作用角時 開角(°)
有効作用角	IN	BTDC 19.0	ABDC 65.0	264.0
バルブリフト	EX	BBDC 70.0	ATDC 14.0	264.0





*ランプ部分を除いた有効作用角の始点と終点の数値

カムタイミング		OPENS(°)	CLOSES(°)	1mmリフト時 開角(°)
1mm	IN	BTDC 1.2	ABDC 49.8	231.0
バルブリフト	EX	BBDC 36.4	BTDC 2.6	231.0

*ランプ部分を含めたバルブの開き始めと閉じ終わりから1mmの点での数値

カムタイミング		OPENS(°)	CLOSES(°)	0.05"リフト時 開角(°)
0.05"	IN	ATDC 1.4	ABDC 47.4	226.0
バルブリフト	EX	BBDC 39.0	BTDC 5.0	226.0

*ランプ部分を含めたバルブの開き始めと閉じ終わりから0.05インチの点での数値

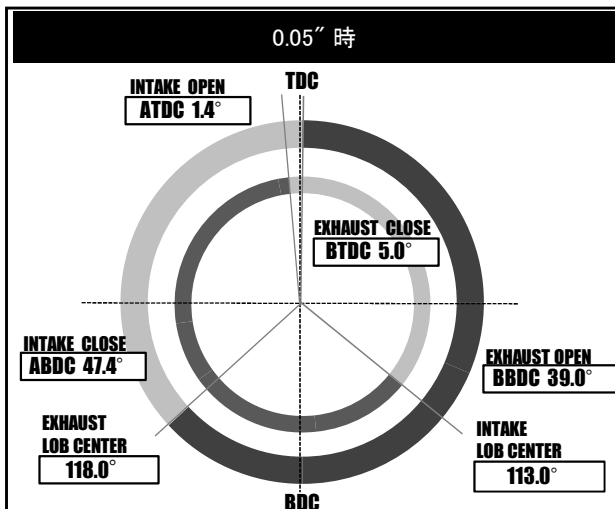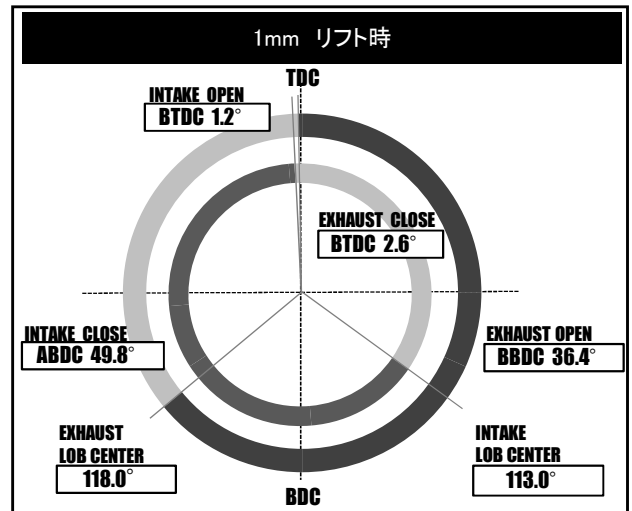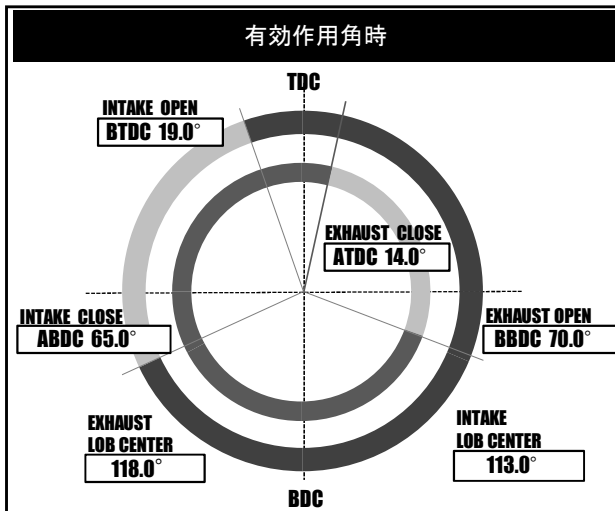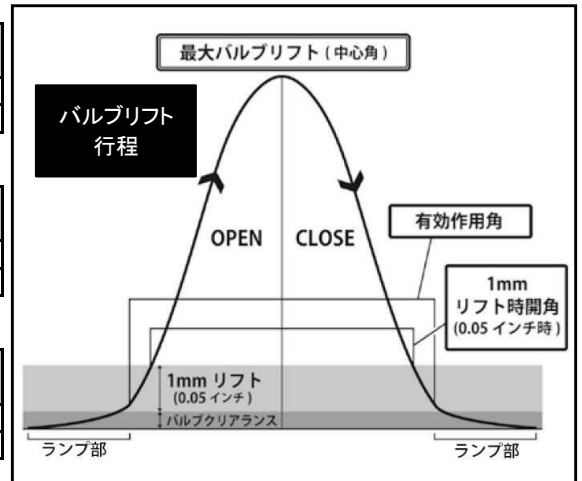

推奨バルブスプリング

自由長	
セット長	
リフト長	
密着長	
セット荷重	
リフト荷重	
TOMEI品番	

必要部品

製品名	TOMEI品番

TOMEI Camshaft Spec Card

PART NAME PONCAM / PROCAM **ENGINE** 2JZ-GTE Early model

PART NUMBER SET 143072 IN 1402264095 EX 1403264095

GRIND	IN	264° / 9.50mm	SOLID	BASE CIRCLE	IN	φ 36.0	ROCKER ARM RATIO※	-	VALEVE CLEARANCE WHEN COLD	IN	0.20
	EX	264° / 9.50mm	SOLID		EX	φ 36.0				EX	0.30

LIFT	IN	@CAM 9.50mm	@VALVE 9.30mm	LOBE CENTER(°)	IN	113.0
	EX	@CAM 9.50mm	@VALVE 9.20mm		EX	118.0

*ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		A CTUAL DURATION @OPENING(°)
A CTUAL DURATION	IN	BTDC	19.0	ABDC	65.0	
VALVE LIFT	EX	BBDC	70.0	ATDC	14.0	264.0





*Values shown are,from start to the end of actual duration.(Excluding rht ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	BTDC	1.2	ABDC	49.8	
VALVE LIFT	EX	BBDC	36.4	BTDC	2.6	231.0

*Values are of actual duration from start to end of 1mm valve points.(Ezcluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	ATDC	1.4	ABDC	47.4	
VALVE LIFT	EX	BBDC	39.0	BTDC	5.0	226.0

*Values are of actual duration from start to end of 0.05" value points.(Excluding ramp values)

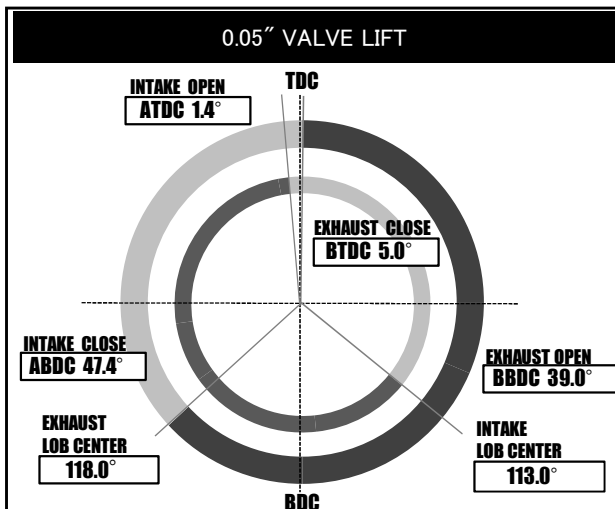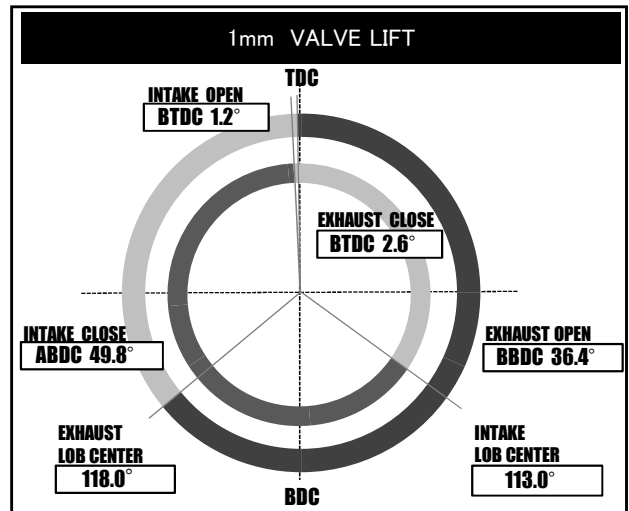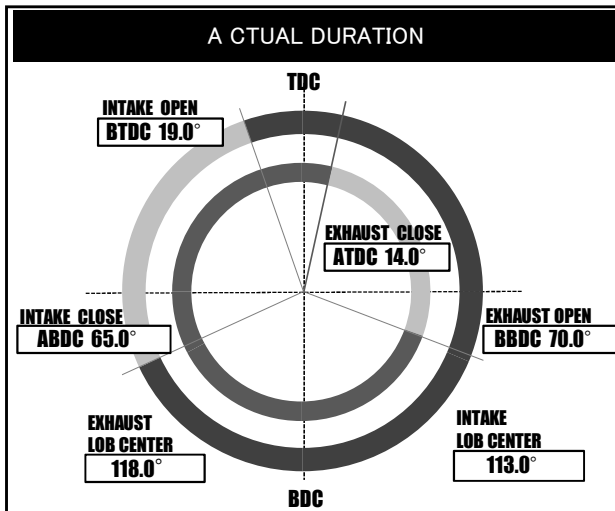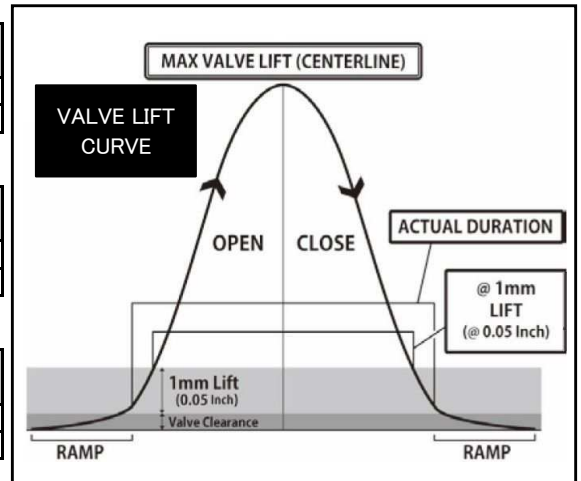

REQUIRED VALVE SPRING SPEC	
NOMAL HIGHT	
SET LENGTH	
LIFT LENGTH	
COMPRESSED HEIGHT	
SET LAOD	
LIFT LOAD	
TOMEI PART NUMBER	

REQUIRED PARTS	
PRODUCT NAME	TOMEI P/N