

TOMEI Camshaft Spec Card

PART NAME		PROCAM		ENGINE		4G63 EVO 9 LASH	
PART NUMBER		SET		IN	1462270115	EX	1463270115
GRIND	IN	270° / 11.50mm	-	FACE CIRCLE(Φ)	IN	Φ30.0	ROCKER ARM RATIO*
	EX	270° / 11.50mm	-		EX	Φ30.0	
LIFT		@CAM 6.65mm	@VALVE 11.50mm	LOBE CENTER(°)	IN	130.0	VALVE CLEARANCE WHEN COLD
		@CAM 6.65mm	@VALVE 11.50mm		EX	110.0	

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ Opening(°)
Actual Duration	IN	TDC	ABDC 90.0	270.0
Valve Lift	EX	BBDC 70.0	ATDC 20.0	270.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm Valve Lift	IN	ATDC 15.0	ABDC 62.5	227.5
	EX	BBDC 43.5	ATDC 3.0	226.5

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05" Valve Lift	IN	ATDC 18.0	ABDC 59.0	221.0
	EX	BBDC 40.5	TDC	220.5

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

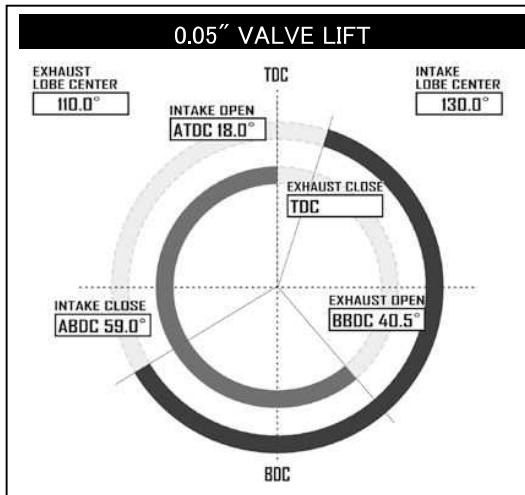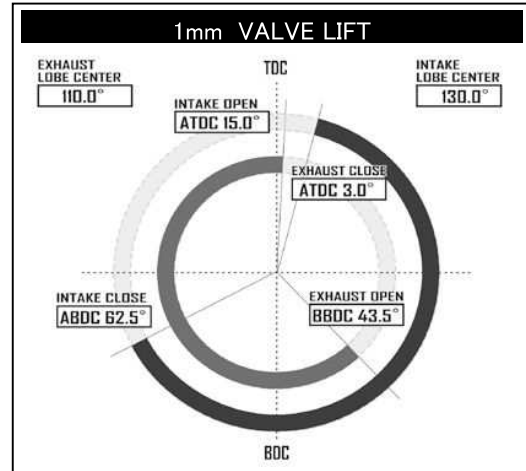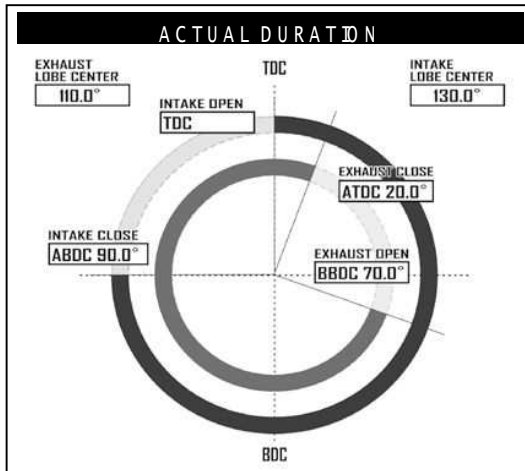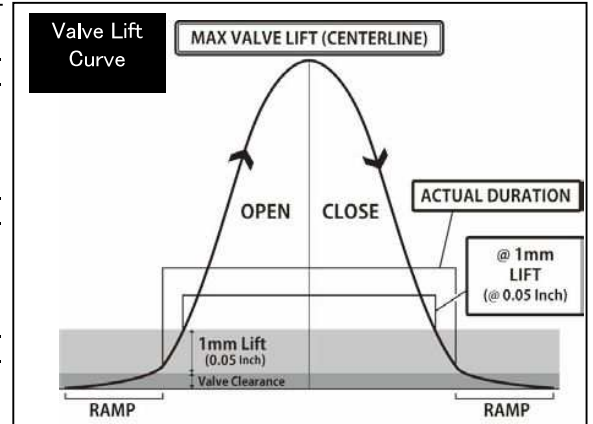

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	50.8mm
SET LENGTH	39.6mm
LIFT LENGTH	28.1mm
COMPRESSED HEIGHT	27.1mm
SET LOAD	33.6kgf ± 5%
LIFT LOAD	81.7kgf ± 6%
TOMEI PART NUMBER	163034

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER