

TOMEI Camshaft Spec Card

PART NAME		PROCAM		ENGINE		A12/14/15	
PART NUMBER		1481320072					
GRIND	320° / 7.25mm	SOLID	BACE	Φ27.4	ROCKER ARM RATIO *	VALVE CLEARANCE WHEN COLD	0.30
			CIRCLE(Φ)		1.5		
LIFT	@CAM 7.25mm	@VALVE 10.50mm	LOBE CENTER(°)	105.0			

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ opening(°)
Actual Duration	IN	BTDC 55.0	ABDC 85.0	320.0
Valve Lift	EX	BBDC 85.0	ATDC 55.0	320.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm	IN	BTDC 28.0	ABDC 58.0	266.0
Valve Lift	EX	BBDC 58.0	ATDC 28.0	266.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05"	IN	BTDC 26.5	ABDC 56.5	263.0
Valve Lift	EX	BBDC 56.5	ATDC 26.5	263.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

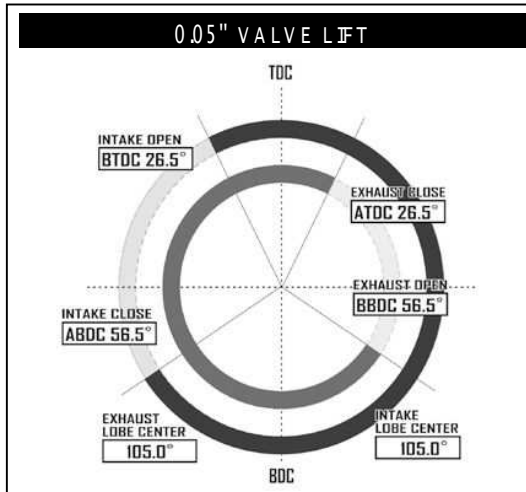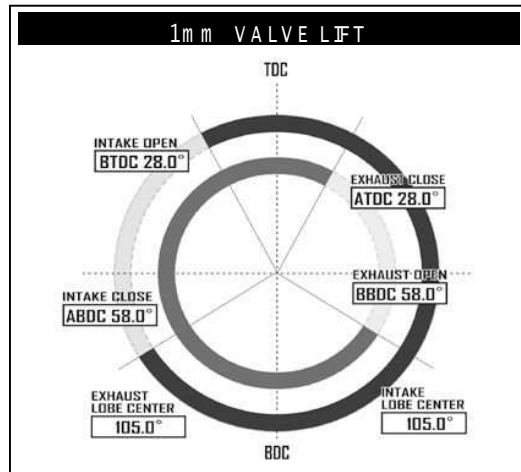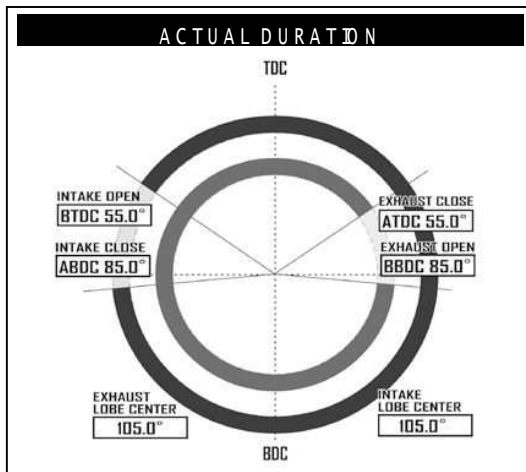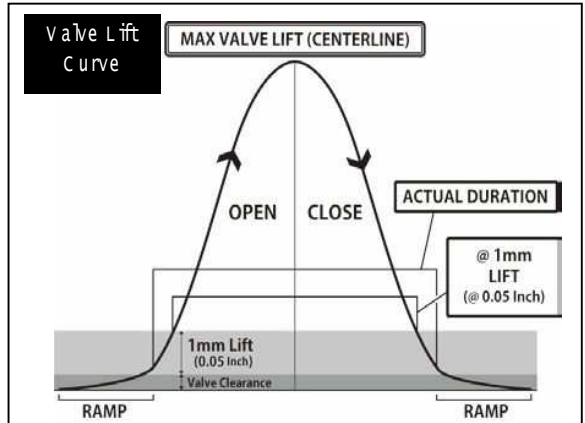

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	45.9/48.1mm
SET LENGTH	34.7/38.0mm
LIFT LENGTH	23.7/27.0mm
COMPRESSED HEIGHT	21.2/25.2mm
SET LOAD	35.5kgf
LIFT LOAD	92.9kgf
TOMEI PART NUMBER	163038

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER